

PLODDERS







PLODDERS

The majority of our plodders are customized units which are available with different layout combinations, different L/D (length to diameter) ratios, use of various materials, several and customized screw (worm) designs, multiple options and of course are offered in different sizes.


More economical "pelletizers" are offered for various applications including "pre-refining" Multi-colored systems are available in solid-liquid and solid-solid variations.

Besides the "conventional" plodders, we can offer the special TRANSAVON plodders with

unique features, like the long L/D ratio "comboscrew" and the "milling valve". They are applicable for refining and extruding all types of soap products.

Ask for our separate detailed TRANSAVON leaflet.

The SAS team is ready to share its expertise in proposing the most suitable plodders for your production requirements.

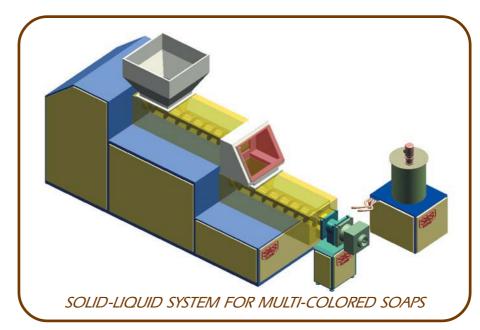

SCREW	SINGLE-SCREW		TWIN-SCREW	
Diameter (mm)	Output Range (Kg/h)	Installed Power (kW)	Output Range (Kg/h)	Installed Power (kW)
115	150	3	350	5.5
160	300-500	5.5-7.5	800-1200	11-15
200	800-1200	9.5-15	1600-2000	18.5-22
250	1500-2000	18.5-22	2500-3500	30-37
300	2250-2750	30-37	3500-4500	45-55
350	3000-4000	37-45	4500-5500	55-75

SAS MARIANI TOMMASO VIA TOSCANINI 46 20038 SEREGNO, ITALY Phone: 39/0362-239988 Fax: 39/0362-328413 E-mail: sales@sasoap.com

www.sasoap.com